





Rubber coated magnet with internal thread

Model	D(mm)	H1(mm)	M	Pull force (kg)
IN22	22	6	4	3
IN25	25	6	5	4
IN31	31	6	4/5/6	10
IN34	34	8	4	6
IN38	38	8.5	6	13
IN43	43	6	4/5/6	8.5
IN66	66	8.5	5/6	18
IN88	88	8.5	6/8	42

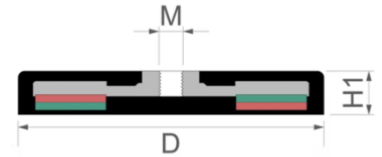

Rubber coated magnet with external thread

Model	D(mm)	H1(mm)	H2(mm)	M	Pull force (kg)
AU22	22	6	13.5	4	3
AU25	25	6	13.5	5	4
AU31	31	6	15	4/5/6	10
AU34	34	8	16.5	4	6
AU38	38	8.5	23.5	6	13
AU43	43	6	21	4/5/6	8.5
AU66	66	8.5	23.5	5/6/8	18
AU88	88	8.5	23.5	8/10	42

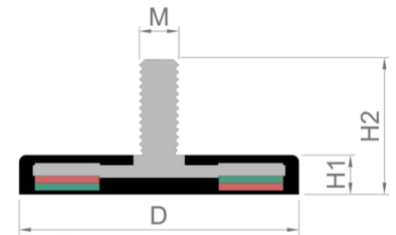

We supply custom magnets and magnetic assemblies.




Customized Neodymium Magnets

Material grade / Dimension / Coating / Magnetization / Tolerance / Engineering drawing / Qty ...


[Inquiry](#)



Rubber coated magnet with threaded bush						
Model	D(mm)	H1(mm)	H2(mm)	M	d1(mm)	Pull force (kg)
GB22	22	6	13.5	4	6	3
GB25	25	6	13.5	5	8	4
GB31	31	6	15	4/5/6	8	10
GB34	34	8	14	4	8	6
GB38	38	8.5	15	6	8	13
GB43	43	6	10.5	4/5/6	8	8.5
GB66	66	8.5	15	5/6/8	10	18
GB88	88	8.5	19	5/8/10	12	42

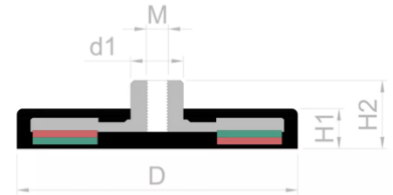

Rubber coated magnet with countersunk hole					
Model	D(mm)	H(mm)	d1(mm)	d2(mm)	Pull force (kg)
SB43	43	6	7.6	13	8
SB66	66	8.5	7.6	13	18
SB66	88	8.5	7.6	13	42

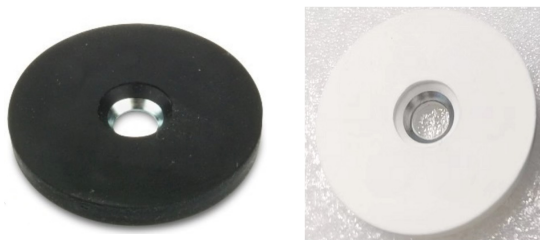

We supply custom magnets and magnetic assemblies.



Customized Neodymium Magnets
 Material grade / Dimension / Coating / Magnetization /
 Tolerance / Engineering drawing / Qty ...

Inquiry